




# Specifications

## Buckets suitable for 26 to 30 ton Weight excavators

Trench Buckets  
Our Ref:

SAO26




| Part             | Material                       |
|------------------|--------------------------------|
| Side Reinforcer  | 30mm                           |
| Lower Side Plate | 25mm                           |
| upper side plate | 10mm                           |
| Top Beam         | 168mm tube                     |
| Toe Plate        | 40mm x 300mm 400HB             |
| Teeth            | Cat J400 (Kingmet 40 optional) |
| Wear Ribs        | 20mm Horizontals               |

| Part No. | Width (" | (mm)   | Capacity |
|----------|----------|--------|----------|
| 26/24    | 24"      | 610mm  | 0.74     |
| 26/30    | 30"      | 762mm  | 0.94     |
| 26/36    | 36"      | 914mm  | 1.13     |
| 26/42    | 42"      | 1067mm | 1.33     |
| 26/48    | 48"      | 1219mm | 1.52     |
| 26/54    | 54"      | 1372mm | 1.74     |
| 26/60    | 60"      | 1524mm | 1.93     |
| 26/66    | 66"      | 1676mm | 2.13     |

Grading Buckets  
Our Ref:

SAO 299

| Part       | Material           |
|------------|--------------------|
| Side Plate | 20mm               |
| Centre Rib | 25mm               |
| Top Beam   | 120mm tube         |
| Toe Plate  | 30mm x 250mm 280HB |
| wear ribs  | 10mm raps          |

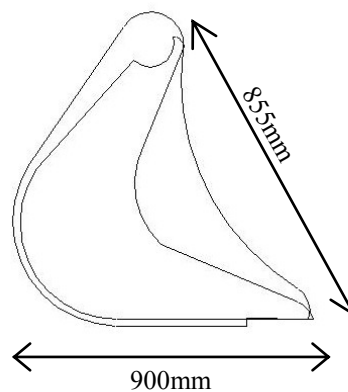

| Part No. | Width (" | (mm)   | Capacity |
|----------|----------|--------|----------|
| 299/72   | 72"      | 1829mm | 0.86     |
| 299/84   | 84"      | 2134mm | 1.02     |
| 299/96   | 96"      | 2438mm | 1.15     |
| 299/108  | 108"     | 2743mm | 1.31     |

Capacities are in Cubic Metres SAE heaped