





# Specifications

## 12 to 15 ton Concrete Pulverisor

Abiljo Pulverisors are designed to be operated direct from the machines existing hydraulics without the need of an extra hydraulic service  
 They mount directly to the end of the dipper and link as with a bucket and then have a brace arm which pins to the underside of the dipper using a brace pad (supplied) to hold the fixed half in place




The lower crushing legs and toeplates are manufactured completely from Hardox 400 and 450 type material for strength and for increased attachment life

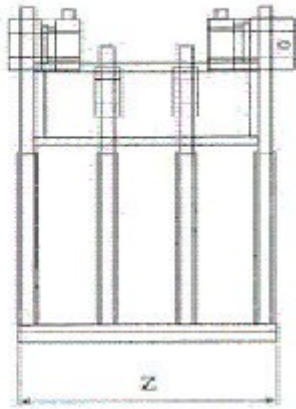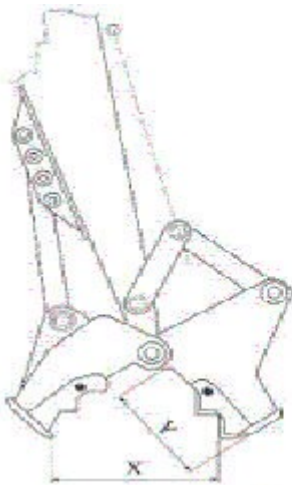

**Material Specs:**

- 4 leg fixed half:
  - 4 x 25mm Hardox 450 legs
  - 2 x 25mm Hardox 450 toeplates
- 3 leg moving half:
  - 2 x 25mm Hardox 450 outer legs
  - 1 x 40mm Hardox 450 main nose (central leg)
  - 1 x 30mm Hardox 450 toeplate

Carrier weight	Part No.	Jaw Opening (X) approx	Fixed Jaw Width (Z)	Jaw depth (Y)	Weight
12 to 15 ton	P130	760mm	500mm	640mm	970kg

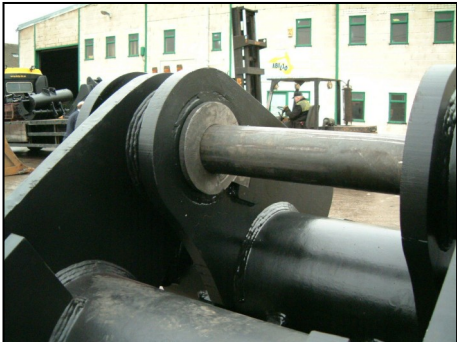

The Pulverisor hinges on the main dipper pin and comes complete with a longer hardened main pin.  
 The main hinge uses 2 hardened top hat bushes to hold the 2 halves together when the main pin is removed, and the hinge also has replace-able hardened insert bushes.

